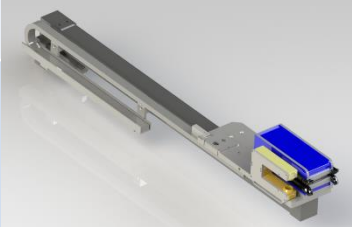


# Technical Specifications- The BF200

Category	Technical Spec	Comments
Precision	0.01 mil (0.25 Micron)	Guaranteed to be the most precise on the market
Material Thickness Range	0.1 to 35 Mils (2.5 to 889 micron)	Custom units can be built to accommodate thicker ranges as necessary.
Voltage	110V 60Hz Standard/220V Available	All international frequencies and voltages available
Weight	25 lbs (11.4 kgs)	Slide and Head
Dimensions	37.5" Long, 9.5" Tall, 5.25" Wide (95.25 cm Long, 24.13 cm Tall, 13.3. cm Wide)	Slide and Head 
Data Collection	Every two or three degrees of rotation	User Specified
Travel Distance of the Slide	24" (61 cm)	Other lengths available upon request
Linearity	+/- 0.1%	Highly linear response greatly reduces calibration recipe count. Market Leading
Stability	Calibration stable year after year, no recalibration required	Market leading